

APPLICATION NO. 09/846,410

TITLE OF INVENTION: Multiple Data Rate Hybrid Walsh Codes for
CDMA

INVENTOR: Urbain A. von der Embse

Currently amended DRAWINGS AND PERFORMANCE DATA

Amendments to the original drawings and performance data
are

- 1) minor corrections to the titles of FIG. 5,6, and
- 2) in FIG.6, the DFT decoding is placed in front of the complex Walsh decoding to be consistent with the specification. In the original drawings the DFT followed the Walsh which was my error.

APPLICATION NO. 09/846,410

TITLE OF INVENTION: Multiple Data Rate Hybrid Walsh Codes for
CDMA

INVENTOR: Urbain A. von der Embse

DRAWINGS AND PERFORMANCE DATA

APPLICATION NO. 09/846,410

TITLE OF INVENTION: Multiple Data Rate Complex Hybrid Walsh Codes
for CDMA

INVENTOR: Urbain A. von der Embse

5

BACKGROUND OF THE INVENTION

I. Field of the Invention ~~TECHNICAL FIELD~~

10

The present invention relates to CDMA (Code Division Multiple Access) cellular telephone and wireless data communications with data rates up to multiple T1 (1.544 Mbps) and higher (>100 Mbps), and to optical CDMA with data rates in the Gbps and higher ranges. Applications are mobile, point-to-point and satellite communication networks. More specifically the present invention relates to novel multiple data rate algorithms for ~~complex hybrid and generalized hybrid complex Walsh orthogonal CDMA codes. These algorithms generate multiple code~~ length complex Walsh and hybrid complex Walsh orthogonal codes for use as the channelization codes for multiple data rate users. These new algorithms and codes offer substantial improvements over the current real Walsh orthogonal variable spreading factor (OVSF) CDMA codes for the next generation wideband CDMA (W-CDMA).

15

20

25

CONTENTS

BACKGROUND ART	page 1
SUMMARY OF INVENTION	page 13
BRIEF DESCRIPTION OF DRAWINGS	page 14
DISCLOSURE OF INVENTION	page 15
REFERENCES	page 44
DRAWINGS	page 45

30

II. Description of the Related Art ~~BACKGROUND ART~~

Current art is represented by the work on orthogonal
5 spreading factor (OVSF) real Walsh codes for wideband CDMA (W-
CDMA) for the third generation CDMA (G3) proposed standard
candidates and for broadband wireless communications, and the
previous work on the real Walsh fast transform algorithms.
These are documented in the references 1,2,3,4,5. ~~Reference 1 is~~
10 ~~which include an issue of the IEEE communications journal devoted~~
~~to wideband CDMA including OVSF., References 2 and 3 are issues~~
~~of the IEEE communications magazine that are devoted to~~
~~"Multiple Access for Broadband Networks" and "Wideband CDMA".~~
~~Reference 4 is an issue of the IEEE personal communications~~
15 ~~devoted to "Third Generation Mobile Systems in Europe".~~
~~Reference 5 is and the widely used reference "Walsh functions and~~
~~their Applications"—on real Walsh technology which includes~~
~~algorithms for the fast Walsh transform. The new hybrid complex~~
~~Walsh and generalized hybrid complex Walsh orthogonal CDMA codes~~
20 ~~being addressed in this invention for application to multiple~~
~~data rate users, have been disclosed in a previous patent~~
~~application {6} 09/826,117 for constant data rate communications.~~

Current art using real Walsh orthogonal CDMA channelization
25 codes to generate OVSF codes for multiple data rate users is
represented by the scenario described in the following with the
aid of equations (1) and (2) and FIG. 1,2,3,4. This scenario
considers CDMA communications spread over a common frequency band
for each of the communication channels. These CDMA
30 communications channels for each of the multiple rate users are
defined by assigning a unique real Walsh orthogonal spreading
code to each user. This real Walsh code has a maximum length of
N chips with $N=2^M$ where M is an integer, with shorter lengths
of 2,4,...,N/2 for the higher data rate users. These multiple

Page 2 Specification amendments to 09/846,410

In line 2 please delete the strikethrough text and add the underlined text.

In lines 9,10,11 please delete the strikethrough text and add the underlined text.

In lines 13-19 please delete the strikethrough text and add the underlined text.

In lines 22 please delete the strikethrough number and add the underlined number.

Page 3 Specification amendments to 09/846,410

In line 30 please add the underlined words.

Page 7 Specification amendments to 09/846,410

In line 8 please add the underlined text.

length real Walsh codes have limited orthogonality properties and occupy the same frequency band. These Walsh encoded user signals are summed and then re-spread over the same frequency band by PN codes, to generate the CDMA communications signal which is modulated and transmitted. The communications link consists of a transmitter, propagation path, and receiver, as well as interfaces and control.

It is assumed that the communication link is in the communications mode with the users communicating at symbol rates equal to the code repetition rates of their respective communications channels and that the synchronization is sufficiently accurate and robust to support this communications mode. In addition, the power differences between users due to differences in data rates and in communication link budget parameters is assumed to be incorporated in the data symbol amplitudes prior to the CDMA encoding in the CDMA transmitter, and the power is uniformly spread over the wideband by proper selection of the CDMA pulse waveform. It is self evident to anyone skilled in the CDMA communications art that these communications mode assumptions are both reasonable and representative of the current CDMA art and do not limit the applicability of this invention.

Transmitter equations (1) describe a representative real Walsh CDMA encoding for multiple data rate users for the transmitter in FIG. 1. These equations represent a considerably more sophisticated and improved implementation of current OVSF CDMA communications which has been developed to help support the new invention for hybrid complex Walsh and generalized hybrid complex Walsh CDMA orthogonal codes.

Lowest data rate users are assumed to communicate at the lowest symbol rate equal to the code repetition rate of the N chip real Walsh code, which means they are assigned N chip code

vectors from the $N \times N$ real Walsh code matrix W_N in 1 for their channelization codes. Higher data rate users will use shorter real Walsh codes. The reference real Walsh code matrix W_N has N Walsh row code vectors $W_N(c)$ each of length N chips and indexed by $c=0,1,\dots,N-1$, with $W_N(c)=[W_N(c,1),\dots,W_N(c,N)]$ wherein $W_N(c,n)$ is chip n of code c . Walsh code chip n of code vector c has the possible values $W_N(c,n) = \pm 1$.

Multiple data rate menu in 2 lists the possible user data symbol rates R_s and the corresponding code lengths and symbols transmitted over each N chip reference code length. User symbol rate $R_s = 1/NT$ is the code repetition rate $1/NT$ of the N chip code over the code time interval NT . User data rate R_b in bits/second is equal to $R_b = R_s b_s$ where b_s is the number of data bits encoded in each data symbol. Assuming a constant b_s for all of the multiple data rate users, the user data rate becomes directly proportional to the user symbol rate $R_b \sim R_s$ which means the user symbol rate menu in 1 is equivalent to the user data rate menu.

20

User data symbols and channelization codes are listed in 3 for the multiple rate users. Users are grouped into the data rate categories corresponding to their respective code chip lengths $2, 4, 8, \dots, N/2, N$ chips. User groups are indexed by $m=1, 2, \dots, M$ where group m consists of all users with $N(m)=2^m$ chip length codes drawn from the $N(m) \times N(m)$ real Walsh code matrix $W_{N(m)}$. Users within group m are identified by the index u_m which is set equal to the Walsh channelization code vector index in $W_{N(m)}$. Code chip n_m of the user code u_m is equal to $W_{N(m)}(u_m, n_m)$ where $n_m=0, 1, 2, \dots, N(m)-1$ is the chip index. User data symbols $Z(u_{m,k_m})$ are indexed by u_{m,k_m} where the index $k_m=0, 1, 2, \dots, N/N(m)-1$ identifies the data symbols of u_m which are transmitted over the N chip code block. The total number of user data symbols transmitted per N chip block is N which means the number of channel assignments $\{u_m, m=1, 2, \dots, M\}$ will be less than N for

multiple data rate CDMA communications when there is at least one user using a higher data rate.

5 Current multiple data rate real Walsh CDMA encoding **(1)**
for transmitter

1 N chip Walsh code block

10 W_N = Walsh $N \times N$ orthogonal code matrix consisting of
 N rows of N chip code vectors
 = [$W_N(c)$] matrix of row vectors $W_N(c)$
 = [$W_N(c,n)$] matrix of elements $W_N(c,n)$
 $W_N(c)$ = Walsh code vector c for $c=0,1,...,N-1$
 = [$W_N(c,0), W_N(c,1), ..., W_N(c,N-1)$]
15 = $1 \times N$ row vector of chips $W_N(c,0), ..., W_N(c,N-1)$
 $W_N(c,n)$ = Walsh code c chip n
 = ± 1 possible values

2 Multiple data rate menu

20 N chip real Walsh symbol rate
 R_s = User symbol rate, symbols/second
 = $1/NT$ where T = Chip repetition interval

Symbol rate menu for multiple data rates

	Symbol rate, Symbols/second	Code length, chips	Symbols per N chips
R_s =	$1/2T$	2	$N/2$
=	$1/4T$	4	$N/4$
=	$1/8T$	8	$N/8$
	\vdots	\vdots	\vdots
=	$1/2NT$	$N/2$	2
=	$1/NT$	N	1

3 User data symbols and channelization codes

Users are categorized into M groups according to the number of code chips.

- 5 m = Index of the user groups
 = $1, 2, \dots, M$
 u_m = One of up to $N(m)=2^m$ possible users in group m
 $N(m)$ = Number of code chips for the codes in the user
 group m
 10 = 2^{m+1}

User data symbols

- $Z(u_{m,k_m})$ = User u_m data symbol k_m
 k_m = Index for the user data symbols over the N
 chip code block, for a user from group m
 15 = $0, 1, 2, \dots, N/N(m)-1$

User channelization codes within each group are selected from a subset of the orthogonal codes in the Walsh code matrix.

- 20 $W_{N(m)}(u_m)$ = Walsh 1×2^m dimensional code vector u_m in
 the $N(m) \times N(m)$ Walsh code matrix, for user u_m
 in the group m
 $W_{N(m)}(u_m, n_m)$ = User u_m code chip $n_m=0, 1, 2, \dots, N(m)-1$

25

4 Real Walsh encoding and channel combining

$$\begin{aligned} \tilde{Z}(n) &= \text{Real Walsh CDMA encoded chip } n \\ &= \sum_{m=1}^M \sum_{u_m} Z(u_{m,k}) W_{N(m)}(u_m, n=n_m + k_m N(m)) \end{aligned}$$

30

5 PN scrambling

$P_R(n), P_I(n)$ = PN code chip n for real, imaginary axes

$Z(n)$ = PN scrambled real Walsh encoded data chips
after summing over the users

$$= \sum_u \tilde{Z}(n) [P_R(n) + jP_I(n)] \text{ where } j = \sqrt{-1}$$

$$= \sum_u \tilde{Z}(n) [\text{sgn}\{P_R(n)\} + j\text{sgn}\{P_I(n)\}]$$

= Real Walsh CDMA encoded complex chips
after PN scrambling

Walsh encoding and channel combining in 4 encodes each of the users $\{u_m\}$ and their data symbols $\{Z(u_{m,k_m})\}$ with a Walsh code $W_{N(m)}(u_m)$ drawn from the group m of the $N(m)$ chip channelization codes where u_m is the user code. A time delay of $k_m N(m)$ chips before start of the real Walsh encoding of the data symbol k_m in each of the user channels, is required for implementation of the multiple data rate user real Walsh encoding and for the summation of the encoded data chips over the users. Output of this multiple data rate real Walsh encoding and summation over the multiple data rate users is the set of real Walsh CDMA encoded chips $\{\tilde{Z}(n)\}$ over the N chip block.

PN scrambling of the real Walsh CDMA encoded chips in 5 is accomplished by encoding the $\{\tilde{Z}(n)\}$ with a complex PN which is constructed as the complex code sequence $[P_R(n) + jP_I(n)]$ wherein $P_R(n)$ and $P_I(n)$ are independent PN sequences used for the real and imaginary axes of the complex PN. These PN codes are 2-phase with each chip equal to ± 1 which means PN encoding consists of sign changes with each sign change corresponding to the sign of

the PN chip. Encoding with PN means each chip of the summed Walsh encoded data symbols has a sign change when the corresponding PN chip is -1, and remains unchanged for +1 values. This operation is described by a multiplication of each
5 chip of the summed Walsh encoded data symbols with the sign of the PN chip. Purpose of the PN encoding for complex data symbols is to provide scrambling of the summed Walsh encoded data symbols as well as isolation between groups of users. Output of this real Walsh CDMA encoding followed by the complex PN scrambling
10 are the CDMA encoded chips over the N chip block $\{Z(n)\}$.

Receiver equations (2) describe a representative multiple data rate real Walsh CDMA decoding for the receiver in FIG. 3. The receiver front end 5 provides estimates $\{\hat{Z}(n)\}$ of the
15 transmitted real Walsh CDMA encoded chips $\{Z(n)\}$. Orthogonality property 6 is expressed as a matrix product of the real Walsh code chips or equivalently as a matrix product of the Walsh code chip numerical signs, for any of the 2,4,8,...,N/2,N chip real Walsh channelization codes and their repetitions over the N chip
20 code block. These codes are orthogonal with respect to the user codes within a group. They are also orthogonal between code groups for the allowable subsets of code assignments to the users, for all code repetitions over the N chip code block. This means that the allowable codes $\{u_m\}$ in group m are orthogonal to
25 the allowable codes $\{u_{m+p}\}$ in group m+p for all code repetitions of the codes $\{u_m\}$ over the N chip code block, for $p \geq 0$.

The 2-phase PN codes 7 have the useful decoding property that the square of each code chip is unity which is equivalent to
30 observing that the square of each code chip numerical sign is unity. Decoding algorithms 8 perform the inverse of the signal processing for the encoding in equations (1) to recover estimates $\{\hat{Z}(u_{m,k_m})\}$ of the transmitter user symbols $\{Z(u_{m,k_m})\}$.

Current multiple data rate real Walsh CDMA decoding (2)
for receiver

5 Receiver front end provides estimates $\{\hat{Z}(n) = \hat{R}(n) + j\hat{I}(n)\}$
of the encoded transmitter chip symbols $\{Z(n)\}$

6 Orthogonality properties of the set of real Walsh $\{2 \times 2, 4 \times 4, 8 \times 8, \dots N \times N\}$ matrices

10 The $N(m) \times N(m)$ Walsh code matrices for all m are
orthogonal

$$N(m)^{-1} \sum_{n_m} W_{N(m)}(\hat{c}_m, n_m) W_{N(m)}(n_m, c_m) = \delta(\hat{c}_m, c_m)$$

where $c_m, n_m = 0, 1, \dots, N(m)$

$\delta(\hat{c}_m, c_m) = \text{Delta function of } \hat{c}_m \text{ and } c_m$

15 $= 1, 0 \quad \text{for } \hat{c}_m = c_m, \text{ otherwise}$

The $N(m) \times N(m)$ and $N(m+p) \times N(m+p)$ Walsh code matrices for
all m and $p \geq 0$ are orthogonal for a subset of codes $\{u_m\}$
and $\{u_{m+p}\}$

20
$$N(m)^{-1} \sum_{n_m} W_{N(m)}(u_m, n_m) \bullet W_{N(m+p)}(u_{m+p}, n_{m+p} = n_m + k_m N(m))$$

$$= 0 \text{ for } k_m = 0, 1, 2, \dots, N/N(m) - 1$$

7 PN decoding property

$$P(n) P(n) = \text{sgn}\{P(n)\} \text{sgn}\{P(n)\}$$

$$= 1$$

25 8 Decoding algorithm

$$\hat{Z}(u_{m,k_m}) =$$

$$(2N)^{-1} \sum_{n_m} \hat{Z}(n) [\text{sgn}\{P_R(n)\} - j \text{sgn}\{P_I(n)\}] \bullet$$

$$\text{sgn}\{W_{N(m)}(n = n_m + k_m N(m), u_m)\}$$

= Receiver estimate of the transmitted complex
data symbol $Z(u_{m,k_m})$

Page 10 Specification amendments to 09/846,410

In lines 6-7,9-10 please delete the strikethrough words and add the underlined words.

In line 29 please add the underlined word.

FIG. 1 CDMA transmitter block diagram is representative of a current CDMA transmitter which includes an implementation of the current multiple data rate real Walsh CDMA channelization encoding in equations (1). This block diagram becomes a
 5 representative implementation of the CDMA transmitter which implements the ~~new~~ multiple data rate hybrid~~complex~~ Walsh and generalized hybrid ~~complex~~ Walsh CDMA encoding, when the current multiple data rate real Walsh CDMA encoding 13 is replaced by the new multiple data rate ~~complex~~ hybrid Walsh and
 10 generalized hybrid ~~complex~~ Walsh CDMA encoding of this invention.

Signal processing starts with the stream of user input data words 9. Frame processor 10 accepts these data words and performs the encoding and frame formatting, and passes the
 15 outputs to the symbol encoder 11 which encodes the frame symbols into amplitude and phase coded symbols $\{Z(u_{m,k})\}$ 12. These symbols 12 are the inputs to the current multiple data rate real Walsh CDMA encoding in equations (1). Inputs $\{Z(u_{m,k})\}$ 12 are real Walsh encoded, summed over the users, and scrambled by
 20 complex PN in the current multiple data rate real Walsh CDMA encoder 13 to generate the complex output chips $\{Z(n)\}$ 14. This encoding 13 is a representative implementation of equations (1). These output chips $Z(n)$ are waveform modulated 15 to generate the analog complex signal $z(t)$ which is single sideband
 25 upconverted, amplified, and transmitted (Tx) by the analog front end of the transmitter 15 as the real waveform $v(t)$ 16 at the carrier frequency f_0 whose amplitude is the real part of the complex envelope of the baseband waveform $z(t)$ multiplied by the carrier frequency and the phase angle ϕ which accounts for the
 30 phase change from the baseband signal to the transmitted signal.

It should be obvious to anyone skilled in the communications art that this example implementation in FIG. 1 clearly defines the fundamental CDMA signal processing relevant

to this invention disclosure and it is obvious that this example is representative of the other possible signal processing approaches.

5 FIG. 2 multiple data rate real Walsh CDMA encoding is a representative implementation of the multiple data rate real Walsh CDMA encoding 13 in FIG. 1 and in equations (1). Inputs are the complex user data symbols $\{Z(u)\}$ 17. Encoding of each user by the corresponding Walsh code is described in 18 by the
10 implementation of transferring the sign of each Walsh code chip to the user data symbol followed by a 1-to-N expander $1 \uparrow N$ of each data symbol into an N chip sequence using the sign transfer of the Walsh chips. The sign-expander operation 18 generates the N-chip sequence $Z(u_{m,k_m}) \text{sgn}\{W(u_m, (n=n_m+k_mN(m)))\}$ for $n=0,1,\dots,N-1$
15 for each user $\{u_m\}$. This Walsh encoding serves to spread each user data symbol into an orthogonally encoded chip sequence which is spread over the CDMA communications frequency band. The Walsh encoded chip sequences for each of the user data symbols are summed over the users 19 followed by PN encoding with the
20 scrambling sequence $[P_R(n)+jP_I(n)]$ 20. PN encoding is implemented by transferring the sign of each PN chip to the summed chip of the Walsh encoded data symbols. Output is the stream of complex multiple data rate real Walsh CDMA encoded chips $\{Z(n)\}$ 21.

25

It should be obvious to anyone skilled in the communications art that this example implementation in FIG. 2 clearly defines the fundamental CDMA signal processing relevant to this invention disclosure and it is obvious that this example
30 is representative of the other possible signal processing approaches.

FIG. 3 CDMA receiver block diagram is representative of a current CDMA receiver which includes an implementation of the

describes the corresponding receiving signal processing for the hub and user terminals for applicability to this invention.

For optical communications applications the the microwave
5 processing at the front end of both the transmitter and the receiver is replaced by the optical processing which performs the complex modulation for the optical laser transmission in the transmitter and which performs the optical laser receiving function of the microwave processing to recover the complex
10 baseband received signal.

SUMMARY OF THE INVENTION~~SUMMARY OF INVENTION~~

15

This invention ~~is a new set of~~ discloses fast and computationally efficient algorithms for ~~new~~ multiple data rate orthogonal channelization encoding and decoding for CDMA using the ~~new~~ hybrid complex Walsh codes and the generalized hybrid
20 complex Walsh orthogonal and quasi-orthogonal codes in place of the current real Walsh orthogonal codes. Real Walsh codes are used for current CDMA applications and will be used for all of the future CDMA systems. The ~~newly invented~~ hybrid complex Walsh codes disclosed in ~~6~~-09/826,117 provide the choice of using the
25 ~~new~~ hybrid complex Walsh codes or the real Walsh codes since the real Walsh codes are the real components of the hybrid complex Walsh codes. This means an application capable of using the hybrid complex Walsh codes can simply turn-off the complex axis components of the hybrid complex Walsh codes for real Walsh CDMA
30 coding and decoding.

Performance is improved for the multiple data rate CDMA communications when the ~~new~~ hybrid 4-phase complex Walsh orthogonal CDMA codes replace the current 2-phase real Walsh

codes. ~~These improvements include an increase in the carrier-to-noise ratio (CNR) for data symbol recovery in the receiver, lower correlation side lobes under timing offsets both with and without PN spreading, lower levels of harmonic interference~~
5 ~~caused by non-linear amplification of multi-carrier CDMA signals, and reduced phase tracking jitter for code tracking to support both acquisition and synchronization. These potential performance improvements simply reflect the widely known principle that complex CDMA is better than real CDMA.~~

10 ~~In addition to the Greater flexibility in performance improvement, there are greater and code length choices for multiple data rate CDMA communications using are available with the new generalized hybrid complex Walsh orthogonal and quasi-~~
15 ~~orthogonal CDMA codes in place of the which are generated by combining complex Walsh orthogonal CDMA codes which have been disclosed in [6]. Code length choices are increased by the combined use of hybrid complex Walsh and discrete Fourier transform complex orthogonal codes and the plurality of other~~
20 ~~codes including quasi-orthogonal PN using a Kronecker construction which is a tensor construction, direct sum construction, as well as the possibility for more general functional combining.~~

25 BRIEF DESCRIPTION OF THE DRAWINGS AND THE PERFORMANCE DATA

~~BRIEF DESCRIPTION OF DRAWINGS~~

30 The above-mentioned and other features, objects, design algorithms, and performance advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings and performance

data wherein like reference characters and numerals denote like elements, and in which:

FIG. 1 is a representative CDMA transmitter signal processing implementation block diagram with emphasis on the current multiple data rate real Walsh CDMA encoding, which contains the signal processing elements addressed by this invention disclosure.

FIG. 2 is a representative real Walsh CDMA encoding implementation diagram with emphasis on the current multiple data rate real Walsh CDMA encoding which contains the signal processing elements addressed by this invention disclosure.

FIG. 3 is a representative CDMA receiver signal processing implementation block diagram with emphasis on the current multiple data rate real Walsh CDMA decoding which contains the signal processing elements addressed by this invention disclosure.

FIG. 4 is a representative CDMA decoding implementation diagram with emphasis on the current multiple data rate real Walsh CDMA decoding which contains the signal processing elements addressed by this invention disclosure.

FIG. 5 is a representative CDMA encoding implementation diagram which describes the ~~new~~-hybrid complex Walsh and generalized hybrid complex Walsh CDMA encoding of multiple data rate users and which contains the signal processing elements addressed by this invention disclosure.

FIG. 6 is a representative CDMA decoding implementation diagram which describes the ~~new~~-hybrid complex Walsh and generalized hybrid complex Walsh CDMA decoding of multiple data

rate users and which contains the signal processing elements addressed by this invention disclosure.

5 DISCLOSURE OF THE INVENTION

~~DISCLOSURE OF INVENTION~~

The ~~new~~ invention provides the algorithms and implementation architectures to support simultaneous multiple data rates or equivalently simultaneous multiple symbol rates using the ~~new~~ hybrid complex Walsh and generalized hybrid complex Walsh orthogonal CDMA codes which have been disclosed in the invention application [6]09/826,117. In this invention disclosure the complex Walsh codes are hybrid Walsh codes and generalized complex Walsh codes are generalized hybrid Walsh codes. Simultaneous multiple data rates over the same CDMA frequency spectrum are well known in CDMA networking and been included in the next generation UMTS 3G evolving CDMA using wideband CDMA (W-CDMA) and real Walsh orthogonal CDMA channelization codes.

20

The current art uses three categories of techniques designed to accommodate multiple data rate users and these are A) multiple chip length codes for the multiple data rate users, B) same chip length codes with the number of codes adjusted as required for the multiple data rate users, and C) different frequency spectrums assigned to the multiple data rate users which is frequency division multiplexing (FDM). The first technique is the preferred choice for W-CDMA primarily because of the de-multiplexing and multiplexing required for the second technique and because of the configurable multi-rate filters required for the spectrum partitioning in the third approach. This new invention implements the second and third approaches without their disadvantages and moreover provides the added performance improvements that will be realized with the use of

30

the complex Walsh and generalized ~~hybrid~~-complex Walsh codes in place of the real Walsh codes. These ~~new~~ 4-phase complex Walsh orthogonal CDMA codes replacing the current 2-phase real Walsh codes will provide improvements that include an increase in the carrier-to-noise ratio (CNR) for data symbol recovery in the receiver, lower correlation side-lobes under timing offsets both with and without PN spreading, lower levels of harmonic interference caused by non-linear amplification of multi-carrier CDMA signals, and reduced phase tracking jitter for code tracking to support both acquisition and synchronization. ~~These potential performance improvements simply reflect the widely known principle that complex CDMA is better than real CDMA. The hybrid complex Walsh offers these same improvements together with the flexibility of more choices in the code lengths at the expense of increasing the number of code phases on the unit circle thereby introducing multiplications into the encoding and decoding implementations.~~

The ~~new~~ complex Walsh and ~~hybrid~~ complex Walsh CDMA orthogonal codes ~~disclosed in [6]~~ have been invented to be the natural development for the Walsh codes and therefore are the correct complex Walsh codes to within arbitrary factors that include scale and rotation, which are not relevant to performance. This natural development of the complex Walsh codes in the N-dimensional complex code space C^N extended the correspondences between the real Walsh codes and the Fourier codes in the N-dimensional real code space R^N , to correspondences between the complex Walsh codes and the discrete Fourier transform (DFT) codes in C^N .

The ~~new~~ generalized ~~hybrid~~-complex Walsh orthogonal and quasi-orthogonal CDMA codes have been invented to increase the choices for the code length by and for the performance by allowing the combined use of combining complex Walsh and Walsh and discrete Fourier transform complex orthogonal codes and the

plurality of other codes including quasi-orthogonal PN using a Kronecker construction which is a tensor construction, direct sum construction, as well as the possibility for more and general functional combining.

5

Transmitter equations (3) describe a representative complex Walsh CDMA encoding for multiple data rate users for the transmitter in FIG. 1 using the definition of the complex Walsh CDMA codes in the invention application [6] 09/826,117. The

10 Lowest data rate users are assumed to communicate at the lowest symbol rate equal to the code repetition rate of the N chip complex Walsh code, which means ~~they are each~~ is assigned an N chip code vectors from the NxN complex Walsh code matrix \tilde{W}_N in 36 for their channelization codes. Higher data rate users will use shorter multiple complex Walsh codes from \tilde{W}_N . Reference

15 complex Walsh code matrix \tilde{W}_N has N Walsh row code vectors $\tilde{W}_N(c)$ each of length N chips and indexed by $c=0,1,...,N-1$, with $\tilde{W}_N(c)=[\tilde{W}_N(c,0),..., \tilde{W}_N(c,N-1)]$ wherein $\tilde{W}_N(c,n)$ is chip n of code c with the possible values $\tilde{W}_N(c,n)=+/-1 +/-j$. Complex Walsh
20 code vectors in the N dimensional complex code space C^N are defined using the real Walsh code vectors from the N dimensional real code space R^N for the real and complex code vectors using the equation $\tilde{W}_N(c)=W(cr)+jW(ci)$ where the mapping of the complex Walsh code index c into the real Walsh code indices cr and ci is defined by the mapping of c into cr(c) and ci(c) in
25 36. These mappings are lexicographic permutations of the real Walsh which are derived in 09/826,117 from the 1-to-1 sequency~frequency, cosine~even, sine~odd correspondences with the discrete Fourier transform where the symbol "~" represents a
30 1-to-1 correspondence, sequency is the average rate of phase rotations of the complex Walsh code vectors, the cosine and sine

refer to the DFT real and imaginary code vectors, and the even and odd are the even and odd real Walsh code vectors.

The multiple data rate menu in **37** lists the possible user data symbol rates R_s and the number of user code vectors or symbols transmitted over each N chip reference code length. User symbol rate $R_s = 1/N(m)T$ for the users in group m is equal to the number of user data symbols or code vectors $N/N(m)$ over the N chip code block multiplied by the symbol rate rate $1/NT$ of the N chip code. User data rate R_b in bits/second is equal to $R_b = R_s b_s$ where b_s is the number of data bits encoded in each data symbol. Assuming a constant b_s for all of the multiple data rate users, the user data rate becomes directly proportional to the user symbol rate $R_b \sim R_s$ which means the user symbol rate menu in **37** is equivalent to the user data rate menu.

Data symbol vector **38** stores the N data symbols $\{Z(u_{m,k_m})\}$ for the N chip code block in an $1 \times N$ dimensional data symbol vector indexed by $d = d_0 + d_1 2 + d_2 4 + \dots + d_{M-2} N/4 + d_{M-1} N/2 = 0, 1, 2, \dots, N-1$, where the binary word representation is $d = d_0 \dots d_{M-1}$ and the $\{d_m\}$ are the binary coefficients. With the availability of this $1 \times N$ dimensional data symbol vector, it is observed that the real Walsh implementation for the multiple data rate users in **2,3** in equations **(31)** must assign the 2 chip data symbols $Z(u_0, z_k)$ to the d_{M-1} field, the 4 chip data symbols $Z(u_1, z_k)$ to the $d_{M-1} d_{M-2}$ field, ..., and the N chip data symbols $Z(u_{M-1}, z_k)$ to the $d_0 \dots d_{M-1}$ field in order to provide orthogonality between the code vectors in the different groups. For the complex Walsh the same data assignment is used with the modification that the $N/N(m)$ data symbols for the $N(m)$ chip code vectors of group m assigned to data field $d_{M-m} d_{M-m+1} \dots d_{M-1}$ of d using the real Walsh, are now mapped into $N/N(m)$ N -chip code vectors over the same group m data field $d_{M-m} d_{M-m+1} \dots d_{M-1}$ of d . This allows a fast algorithm

to be used and uses the N chip codes over the $d_{M-m}d_{M-m+1} \dots d_{M-1}$ field of ~~d~~ which ~~field~~ and enables each user group to occupy ~~occupies~~ the same sequency band as the frequency band for FDM. This removes the disadvantages of using technique "B" and "C" for W-CDMA, and helps to make the complex Walsh the preferred choice compared to technique "A" which is the current art preferred choice with real Walsh.

~~The~~This new invention has found a means to use the same data fields of the current W-CDMA for real Walsh, for application to the complex Walsh with the added advantages of a fast transform, simultaneous transmission of the user data symbols, and the assignment of these user data symbols to a contiguous sequency band specified by the data field of d for additional isolation between users. For a fully loaded CDMA communications frequency band the N data symbols for the multiple rate users occupy the N available data symbol locations in the data symbol vector $d = d_0 \dots d_{M-1}$. The construction of the data symbol vector is part of this invention disclosure and provides a means for the implementation of a fast complex Walsh encoding and decoding of the multiple data rate complex Walsh CDMA. Examples 1 and 2 in 39 and 40 illustrate representative user assignments to the data fields of the data symbol vector. This mapping of the user data symbols into the data symbol vector is equivalent to setting $c=d$ which makes it possible to develop the fast encoding algorithm

41.

~~New multiple~~Multiple data rate complex Walsh encoding for transmitter (3)

36 N chip complex Walsh code block

\tilde{W}_N = complex Walsh NxN orthogonal code matrix
consisting of N rows of N chip code vectors

= [$\tilde{W}_N(c)$] matrix of row vectors $\tilde{W}_N(c)$

= [$\tilde{W}_N(c,n)$] matrix of elements $\tilde{W}_N(c,n)$

$\tilde{W}_N(c)$ = complex Walsh code vector c

= $W_N(cr) + jW_N(ci)$ for $c=0,1,\dots,N-1$

5

$W_N(cr), W_N(ci)$ = Real Walsh $1 \times N$ code vectors cr, ci

$c = 0,1,2,\dots,N-1$

= Real Walsh code index for N chip block

= (cr, ci) Pair of real Walsh code vectors

10 $cr=cr(c)$ and $ci=ci(c)$ which are assigned to the real and to the imaginary axes

$n = 0,1,2,\dots,N-1$

= Chip index for N chip block

15

Mapping of real Walsh to complex Walsh

Complex Walsh code	Real Axis real Walsh codes	Complex Axis real Walsh codes
c	$cr(c)$	$ci(c)$
0	0	0
1,2,...,N/2-1	2c	2c-1
N/2	N-1	N-1
N/2+1,...,N-1	2N-2c-1	2N-2c

20

25

$\tilde{W}(c,n)$ = complex Walsh code u chip n

= $+/-1 +/-j$ possible values

= $(-1)^{[cr_{M-1}n_0 + \sum_{i=1}^{M-1} (cr_{M-1-i} + cr_{M-i})n_i]}$

+ $j(-1)^{[ci_{M-1}n_0 + \sum_{i=1}^{M-1} (ci_{M-1-i} + ci_{M-i})n_i]}$

30

$cr = \sum_{i=0}^{M-1} cr_i 2^i$ binary representation of cr

$$c_i = \sum_{i=0}^{M-1} c_i 2^i \quad \text{binary representation of } c_i$$

$$n = \sum_{i=0}^{M-1} n_i 2^i \quad \text{binary representation of } n$$

$$\tilde{W}(c) = W_N(cr) + jW_N(ci) \quad \text{for } c_m=0,1,\dots,2^m-1$$

5

37 Multiple data rate menu

Symbol rate menu for multiple data rates

Symbol rate	Symbol rate, Symbols/second	Symbols or code per vectors per N chips
$R_s =$	$1/2T$	$N/2$
$=$	$1/4T$	$N/4$
$=$	$1/8T$	$N/8$
	\vdots	\vdots
$=$	$1/2NT$	2
$=$	$1/NT$	1

10

15

38 Data symbol vector field indexed by $d=d_0+d_12+d_24+\dots+d_{M-2}$


$N/4+d_{M-1} N/2$ is partitioned into M data fields with each assigned to one group of multiple data rate users.

Writing d as a binary word $d=d_0d_1\dots d_{M-1}$ enables the data fields to be identified as d_{M-1} , $d_{M-1}d_{M-2}$, $d_{M-1}d_{M-2}d_{M-3}$, ..., $d_0\dots d_{M-1}$ which respectively are assigned to the user groups u_0, u_1, \dots, u_{M-1} .

20

25

30

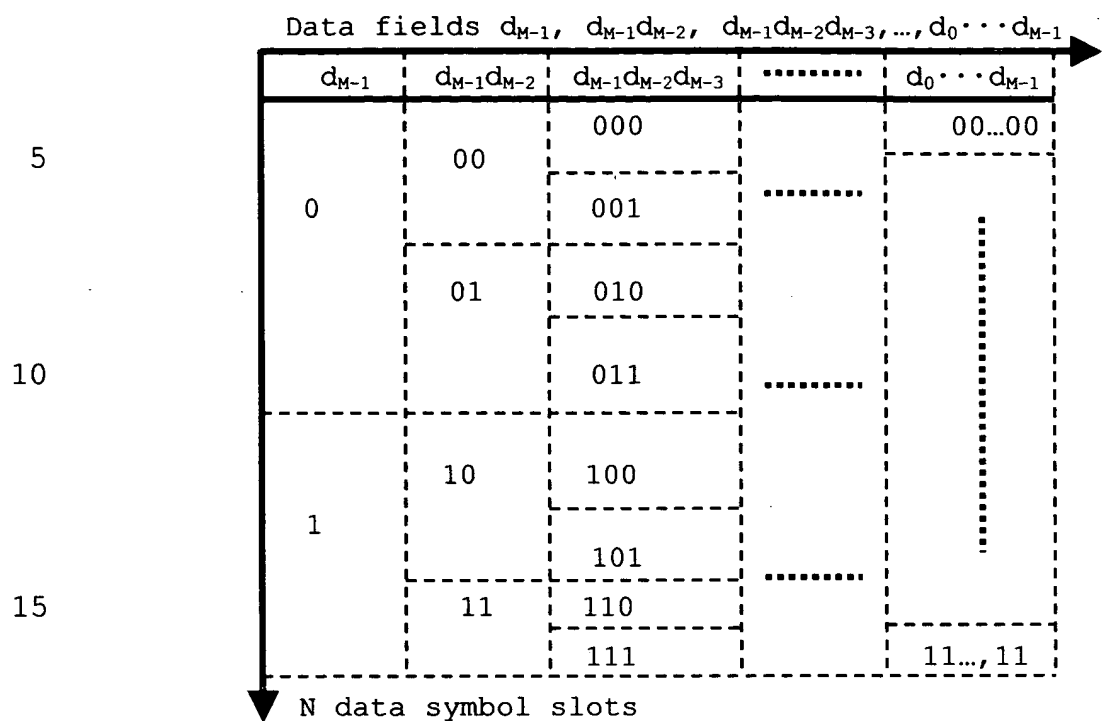

20

25

30

35


Menu of user assignments to the data vector fields

User group	Available channelization codes	Field assignment in data vector
u_0	$u_0=0$	$d_{M-1} = 0$
	$u_0=1$	$= 1$
u_1	$u_1=0$	$d_{M-1}d_{M-2} = 00$
	$u_1=1$	$= 01$
	$u_1=2$	$= 10$
	$u_1=3$	$= 11$
\vdots	\vdots	\vdots
u_{M-1}	$u_{M-1}=0$	$d_0 \dots d_{M-1} = 00 \dots 00$
	\vdots	\vdots
	$u_{M-1}=N-1$	$= 11 \dots 11$

39 Example 1 of multiple data rate menu:

There is 1 user for each group u_0, u_1, \dots, u_{M-2} and 2 users for u_{M-1} with each user selecting the lowest sequency channel corresponding to the lowest index of channels available to the group.

Example 1 of multiple data rate menu

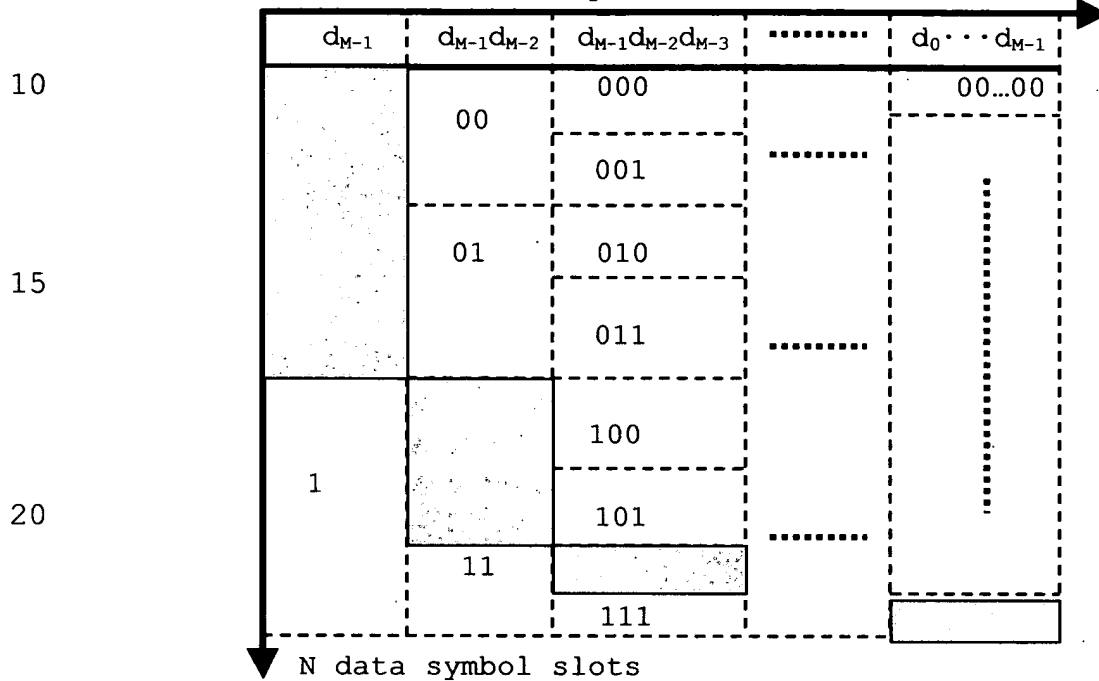

40 Example 2 of multiple data rate menu:

There is 1 user in each group u_0 and u_1 and 2 users in u_2 with each user selecting the highest sequency channel corresponding to the highest index of channels available to the group.

Example 2 of multiple data rate menu

	d_{M-1}	$d_{M-1}d_{M-2}$	$d_{M-1}d_{M-2}d_{M-3}$	$d_0 \cdots d_{M-1}$
5	0	00		00...00
			010	
10			011	
	10	100			
		101			
15		11	110	
		111		11,...,11	

↓ N data symbol slots

41 Complex Walsh encoding and channel combining uses a computationally efficient fast encoding algorithm. This algorithm implements the encoding with an M pass computation. Passes 1,2,3,..., M respectively perform the 2,4,8,..., N chip complex Walsh encoding of the data symbol vector successively starting with the 2 chip encoding in pass 1, the 4 chip encoding in passes 1,2, the 8 chip encoding in pass 1,2,3, and the N chip encoding in passes 1,2,3,..., M where $N=2^M$. Using the binary word representations for both d and n , this M pass algorithm is:

$$\begin{aligned}
& \text{Pass 1: } Z^{(1)}(n_{M-1}d_1 \cdots d_{M-1}) \\
& = \sum_{\substack{\uparrow \\ d_0=dr_0=di_0=0,1}} Z(d_0 \cdots d_{M-1}) [(-1)^{dr_0 n_{M-1}} + j(-1)^{di_0 n_{M-1}}]
\end{aligned}$$

5

⋮

Pass m for m=2, ..., M-1

$$\begin{aligned}
& Z^{(m)}(n_{M-1} \cdots n_{M-m} d_m \cdots d_{M-1}) \\
10 \quad & = \sum_{\substack{\uparrow \\ [(-1)^{dr_{m-1}(n_{M-m}+n_{M-m+1})} + j(-1)^{di_{m-1}(n_{M-m}+n_{M-m+1})}]} Z^{(m-1)}(n_{M-1} \cdots n_{M-m+1} d_{m-1} \cdots d_{M-1}) \cdot \\
& d_{m-1}=dr_{m-1}=di_{m-1}=0,1
\end{aligned}$$

⋮

15

$$\begin{aligned}
& \text{Pass M: } Z^{(M)}(n_{M-1}n_{M-2} \cdots n_1 n_0) \\
& = \sum_{\substack{\uparrow \\ [(-1)^{dr_{M-1}(n_0+n_1)} + j(-1)^{di_{M-1}(n_0+n_1)}]} Z^{(M-1)}(n_{M-1}n_{M-2} \cdots n_1 d_{M-1}) \cdot \\
20 \quad & d_{M-1}=dr_{M-1}=di_{M-1}=0,1 \\
& = \tilde{Z}(n_{M-1}n_{M-2} \cdots n_1 n_0)
\end{aligned}$$

An additional re-ordering pass is added to change the encoded N chip block $\tilde{Z}(n_{M-1}n_{M-2} \cdots n_1 n_0)$ in bit reversed ordering to the normal readout ordering.

25

$$\hat{Z}(n_0 n_1 \cdots n_{M-2} n_{M-1}) = \tilde{Z}(n)$$

42 PN scrambling

$P_R(n), P_I(n)$ = PN code chip n for real and
Imaginary axes

30

$Z(n)$ = PN scrambled complex Walsh encoded data
chips after summing over the users

$$\begin{aligned}
&= \sum_u \tilde{Z}(n) [P_R(n) + jP_I(n)] \\
&= \sum_u \tilde{Z}(n) [\text{sgn}\{P_R(n)\} + j\text{sgn}\{P_I(n)\}]
\end{aligned}$$

The fast algorithm in **41** is a computationally efficient
 5 means to implement the complex Walsh encoding of each N chip code
 block for multiple data rate users whose lowest data rate
 corresponds to the data symbol rate of an N chip encoded user.
 It is easily demonstrated that the number of real additions R_A
 per data symbol is approximately equal to $R_A \approx 2M+2$ in the
 10 implementation of this fast algorithm **41**, where $N=2^M$. For the
 real Walsh encoding it is well known that the fast algorithm
 requires $R_A \approx M+1$ real additions per data symbol. Although the
 number of real adds has been doubled in using the complex Walsh
 compared to the real Walsh, the add operations are a low
 15 complexity implementation cost which means that the complex Walsh
 maintains its attractiveness as a zero-multiplication CDMA
 encoding orthogonal code set.

The fast algorithm in **41** consists of M signal processing
 20 passes on the stored data symbols to generate the complex Walsh
 CDMA encoded chips in bit reversed order. A re-ordering pass can
 changes the bit reversed output to the normal output. Advantage
 is taken of the equality $c=d$ which allows the d to be used in
 the code indices for the complex Walsh: $d_m=c_m$, $d_r=c_r$, $d_i=c_i$.
 25 Pass 1 implements 2 chip encoding, pass 2 implements 4 chip
 encoding, ..., and the last pass M performs $N=2^M$ chip encoding.

PN scrambling of the complex Walsh CDMA encoded chips in
42 is accomplished by encoding the $\{\tilde{Z}(n)\}$ with a complex PN
 30 which is constructed as the complex code sequence $[P_R(n) + jP_I(n)]$
 wherein $P_R(n)$ and $P_I(n)$ are independent PN sequences used for the
 real and imaginary axes of the complex PN. These PN codes are 2-
 phase with each chip equal to ± 1 which means PN encoding

consists of sign changes with each sign change corresponding to the sign of the PN chip. Encoding with PN means each chip of the summed complex Walsh encoded data symbols has a sign change when the corresponding PN chip is -1, and remains unchanged for +1 values. This operation is described by a multiplication of each chip of the summed complex Walsh encoded data symbols with the sign of the PN chip. Purpose of the PN encoding for complex data symbols is to provide scrambling of the summed complex Walsh encoded data symbols as well as isolation between groups of users. Output of this complex Walsh CDMA encoding followed by the complex PN scrambling are the CDMA encoded chips over the N chip block $\{Z(n)\}$.

Transmitter equations (6) for generalized ~~hybrid~~ complex Walsh orthogonal encoding of multiple data rate users are derived by starting with the hybrid complex Walsh orthogonal codes disclosed in ~~the invention application~~ [6].09/826,117. The discrete Fourier transform (DFT) CDMA codes used in the example generation of hybrid complex Walsh orthogonal CDMA codes ~~in~~ [6] are given in equations (4) along with a fast encoding algorithm.

N-chip DFT complex orthogonal CDMA codes (4)

43 DFT code vectors

E_N = DFT $N \times N$ orthogonal code matrix consisting of
 N rows of N chip code vectors
 $= [E_N(c)]$ matrix of row vectors $E(c)$
 $= [E_N(c,n)]$ matrix of elements $E(c,n)$

$E_N(c)$ = DFT code vector c
 $= [E_N(c,0), E_N(c,1), \dots, E_N(c,N-1)]$
 $= 1 \times N$ row vector of chips $E_N(c,0), \dots, E_N(c,N-1)$

$E_N(c,n)$ = DFT code c chip n
 $= e^{j2\pi cn/N}$

$$= \cos(2\pi cn/N) + j\sin(2\pi cn/N)$$

$$= N \text{ possible values on the unit circle}$$

44 Fast encoding algorithm for N chip block of data

5 in the data vector $d=d_0d_1\cdots d_{M-2} d_{M-1}$

Pass 1: $Z^{(1)}(d_0d_1\cdots d_{M-2} n_0)$

$$= \sum_{d_{M-1}=0,1} Z(d_0d_1d_2\cdots d_{M-2}d_{M-1}) e^{j2\pi d_{M-1}n_0/2}$$

$d_{M-1}=0,1$

10

⋮

Pass m for $m=2,\dots,M-1$

15 $Z^{(m)}(d_0\cdots d_{M-m-1}n_{m-1} \cdots n_0)$

$$= \sum_{d_{M-m}} Z^{(m-1)}(d_0\cdots d_{M-m}n_{m-2}\cdots n_0) \bullet$$

$$e^{j2\pi[d_{M-m}(n_0+n_12+\cdots+n_{m-1}2^{(m-1)})/2^m]}$$

d_{M-m}

20

⋮

Pass M for $m=2,\dots,M-1$

$$Z^{(M)}(n_{M-1} \cdots n_0)$$

$$= \sum_{d_0} Z^{(M-1)}(d_0n_{M-2}\cdots n_0) \bullet$$

25 $e^{j2\pi[d_0(n_0+n_12+\cdots+n_{M-1}2^{(M-1)})/2^M]}$

d_0

$$= \tilde{Z}(n_{M-1}n_{M-2}\cdots n_1n_0)$$

An additional re-ordering pass is added to change the
 30 encoded N chip block $\tilde{Z}(n_{M-1}n_{M-2}\cdots n_1n_0)$ in bit reversed
 ordering to the normal readout ordering

$$\tilde{Z}(n_0n_1\cdots n_{M-2}n_{M-1}) = \tilde{Z}(n)$$

Page 23 Specification amendments to 09/846,410 \

In line 8 please delete the strikethrough word and add the underlined words.

Page 29 Specification amendments to 09/846,410

In lines 14,17,19 please delete the strikethrough text and add the underlined text.

Page 31 Specification amendments to 09/846,410

In lines 1-4 please delete the strikethrough text.

In lines 16,20 please delete the strikethrough word and add the underlined words.

In lines 24-34 please delete the strikethrough text and add the underlined text.

~~An additional re-ordering pass is added to change the
 encoded N chip block $\tilde{Z}(n_{M-1}n_{M-2}\dots n_1n_0)$ in bit reversed
 ordering to the normal readout ordering
 $\tilde{Z}(n_0n_1\dots n_{M-2}n_{M-1}) = \tilde{Z}(n)$~~

5

DFT code matrix and the row code vectors are defined in 43
 for an N chip block. A fast algorithm for the encoding of the N
 chip data vector $Z(d_0d_1d_2\dots d_{M-2}d_{M-1})$ is defined in 44 in a format
 10 similar to the fast algorithm for the complex Walsh encoding in
 equations (3). It is well known that the computational
 complexity of the fast DFT encoding algorithm is $R_A \approx 2M$ real
 additions per data symbol plus $R_M \approx 3M$ real multiplications per
 data symbol. The relatively high complexity implementation cost
 15 of multiplies makes it desirable to limit the use of DFT codes to
 applications such as the generalized hybrid complex Walsh wherein
 the number of real multiplies per data symbol can be kept more
 reasonable.

20 Generalized Hybrid complex Walsh orthogonal CDMA codes
 increase the flexibility in choosing the code lengths for
 multiple data rate users at the implementation cost of
 introducing multiply operations into the CDMA encoding and
 decoding. Two ~~of several other~~ means for construction given in
 25 ~~the patent application [6] 09/826,117 are the Kronecker product~~
~~and the direct sum.~~ and functional combining. The direct sum and
functional combining have fast encoding and decoding algorithms
for multiple data rate applications and will not be considered
since the addition of the zero matrix in the construction is
 30 generally not desirable for CDMA communications although the
direct sum construction provides greater flexibility in the
choice of N without necessarily introducing a multiply penalty.
Other codes considered for construction include the orthogonal
Walsh and the quasi-orthogonal PN as well as the plurality of

Page 32 Specification amendments to 09/846,410

In lines 1-3,6,8 please delete the strikethrough text and add the underlined words.

In line 26 please delete the strikethrough word and add the underlined word.

~~possible codes Using the Kronecker product construction in reference [6] the hybrid complex Walsh orthogonal CDMA codes can be constructed as demonstrated in equations (4).~~

5 Equations (5) list construction and examples of the
 generalized ~~hybrid~~ complex Walsh orthogonal CDMA codes using the
 Kronecker approach and DFT matrices E_N to expand the complex
 Walsh to a ~~hybrid~~ generalized complex Walsh. Low order CDMA
 code examples 45 illustrate fundamental relationships between
 10 the DFT, complex Walsh, and the real Walsh or equivalently
 Hadamard. Kronecker construction is defined in 46. CDMA current
 and developing standards use the prime 2 which generates a code
 length $N=2^M$ where $M=\text{integer}$. For applications requiring greater
 flexibility in code length N , additional primes can be used using
 15 the Kronecker construction. We illustrate this in the examples
 47 with the addition of prime=3. The use of prime=3 in addition
 to the prime=2 in the range of $N=8$ to 64 is observed to increase
 the number of N choices from 4 to 9 at a modest cost penalty of
 using multiples of the angle increment 30 degrees for prime=3 in
 20 addition to the angle increment 90 degrees for prime=2. As noted
 in 46 there are several choices in the ordering of the
 Kronecker product construction and 2 of these choices are used in
 the construction.

25

Examples of generalized ~~hybrid complex~~ Walsh orthogonal
 codes (5)

45 Examples of low-order codes

30

$$\begin{aligned}
 2 \times 2 \quad E_2 &= \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \\
 &= (e^{-j\pi/4} / \sqrt{2}) * \tilde{W}_2 \\
 &= H_2 \quad 2 \times 2 \text{ Hadamard}
 \end{aligned}$$

Page 33 Specification amendments to 09/846,410

In line 21 please add the underlined word.

$$3 \times 3 \quad E_3 = \begin{bmatrix} 1 & 1 & 1 \\ 1 & e^{j2\pi/3} & e^{j2\pi 2/3} \\ 1 & e^{j2\pi 2/3} & e^{j2\pi/3} \end{bmatrix}$$

$$4 \times 4 \quad \tilde{W}_4 = \begin{bmatrix} 1+j & 1+j & 1+j & 1+j \\ 1+j & -1+j & -1-j & 1-j \\ 1+j & -1-j & 1+j & -1-j \\ 1+j & 1-j & -1-j & -1+j \end{bmatrix}$$

$$E_4 = \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & j & -1 & -j \\ 1 & -1 & 1 & -1 \\ 1 & -j & -1 & j \end{bmatrix}$$

$$= (e^{-j\pi/4} / \sqrt{2}) \tilde{W}_4$$

46 Kronecker product construction for $N = \prod_k N_k$

Code matrix $C_N = N \times N$ generalized hybrid orthogonal CDMA code matrix

Kronecker product construction of C_N

$$C_N = C_0 \prod_{k>0} \otimes C_{N_k}$$

Kronecker product definition

$A = N_a \times N_a$ orthogonal code matrix

$B = N_b \times N_b$ orthogonal code matrix

$A \otimes B =$ Kronecker product of matrix A and matrix B

$= N_a N_b \times N_a N_b$ orthogonal code matrix consisting of the elements $[a_{ik}]$ of matrix A multiplied by the matrix B

Page 34 Specification amendments to 09/846,410

In lines 25-26 please delete the strikethrough word and equation and add the underlined word and equation.

$$= [a_{ik} B]$$

47 Kronecker product construction examples for primes

5 $p=2,3$ and the range of sizes $8 \leq N \leq 64$

$$8 \times 8 \quad C_8 = \tilde{W}_8$$

$$12 \times 12 \quad C_{12} = \tilde{W}_4 \otimes E_3$$

$$C_{12} = E_3 \otimes \tilde{W}_4$$

$$16 \times 16 \quad C_{16} = \tilde{W}_{16}$$

10 $18 \times 18 \quad C_{18} = \tilde{W}_2 \otimes E_3 \otimes E_3$

$$C_{18} = E_3 \otimes E_3 \otimes \tilde{W}_2$$

$$24 \times 24 \quad C_{24} = \tilde{W}_8 \otimes E_3$$

$$C_{24} = E_3 \otimes \tilde{W}_8$$

$$32 \times 32 \quad C_{32} = \tilde{W}_{32}$$

15 $36 \times 36 \quad C_{36} = \tilde{W}_4 \otimes \tilde{W}_3 \otimes \tilde{W}_3$

$$C_{36} = \tilde{W}_3 \otimes \tilde{W}_3 \otimes \tilde{W}_4$$

$$48 \times 48 \quad C_{48} = \tilde{W}_{16} \otimes \tilde{W}_3$$

$$C_{48} = \tilde{W}_3 \otimes \tilde{W}_{16}$$

$$64 \times 64 \quad C_{64} = \tilde{W}_{64}$$

20

A fast algorithm for the encoding of the ~~hybrid-generalized~~ complex Walsh CDMA orthogonal codes is described in equations (6)

for the representative example **48** which constructs the $N \times N$

25 ~~hybrid-generalized~~ complex Walsh orthogonal CDMA code matrix $C_N =$

$\tilde{W}_{N_0} \otimes E_{N_1} E_{N_1} \otimes \tilde{W}_{N_0}$ —as the Kronecker product of the $N_0 \times N_0$ complex

Walsh \tilde{W}_{N_0} and the $N_1 \times N_1$ complex DFT, where $N = N_0 N_1$. Each chip

element of C_N is the product **49** of the chip elements of the

Page 35 Specification amendments to 09/846,410

In line 22 please delete the strikethrough word and add the underlined word.

In lines 29-31 please delete the strikethrough text.

complex Walsh and complex DFT code matrices. The complex Walsh and DFT codes are phase codes which means the phase of each C_N chip element is the sum of the phases of the chip elements for the complex Walsh and complex DFT. Chip element equations are

$$C_N(c, n) = \tilde{W}_{N_0}(c\tilde{w}, n\tilde{w}) E_{N_1}(ce, ne) \quad \text{with } c = ce + c\tilde{w}N_1 \text{ and } n = ne + n\tilde{w}N_1.$$

For multiple data rate data symbol assignments and for the construction of the fast encoding algorithm, it is convenient to use a binary word representation of the chip element indices c, n . Binary word representation **50** is

$$c = ce_0ce_1 \cdots ce_{M_1-1} c\tilde{w}_{M_1} c\tilde{w}_{M_1+1} \cdots c\tilde{w}_{M-1} = c_0c_1 \cdots c_{M-2}c_{M-1} \text{ where the first binary word is a function of the binary words for the complex Walsh and complex DFT code indices, and the second binary word is a direct representation of the } C_N \text{ indices which will be used for the data vector construction. The same binary word representations apply for the chip index } n \text{ upon substituting the } n \text{ for } c. \text{ User data } \mathbf{38} \text{ in equations (3) for the } N \text{ chip code block is mapped into the } N \text{ data symbol vector } \mathbf{d} = d_0 \cdots d_{M-1} \text{ which is obtained from the binary word for } c \text{ by substituting the index } d \text{ for the index } c \text{ in the binary word representation.}$$

The multiple data rate data symbol mapping **51** in equations **(6)** for the generalized hybrid complex Walsh codes remains the same as used in **38, 39, 40** in equations **(3)** for the complex Walsh codes. The data symbol mapping assigns the $N/2$ data symbols of the 2 chip data symbol transmission rate users to the d_{M-1} field, the $N/4$ data symbols of the 4 chip data symbol transmission rate users are assigned to the $d_{M-1}d_{M-2}$ field, ..., and the single data symbols of the N chip data symbol transmission rate users are assigned to the $d_0 \cdots d_{M-1}$ field, ~~where the data vector index "d" is represented as the binary number $d = d_0 \cdots d_{M-1}$ and the $\{d_m\}$ are the binary coefficients.~~ For a fully loaded CDMA communications frequency band the N data symbols occupy the N available data symbol locations in the data symbol vector $\mathbf{d} = d_0 \cdots d_{M-1}$. The

Page 36 Specification amendments to 09/846,410

In lines 10-11 please delete the strikethrough word and add the underlined words.

In line 19 please delete the strikethrough equation and add the underlined equation.

In line 26 please delete the strikethrough word and add the underlined word.

menu of available user assignments to the data vector fields is given in 38 in equations (3). Examples 1 and 2 in 39 and 40 in equations (3) illustrate representative user assignments to the data fields of the data symbol vector. This mapping of the user data symbols into the data symbol vector is equivalent to setting $c=d$ which makes it possible to develop the fast encoding algorithm 51.

Fast multiple data rate generalized hybrid complex Walsh encoding for transmitter (6)

48 The fast algorithm will be described for the example $N \times N$ complex orthogonal CDMA code matrix C_N which is generated by the Kronecker product of the $N_0 \times N_0$ complex Walsh matrix \tilde{W}_{N_0} and the complex $N_1 \times N_1$ DFT matrix E_{N_1}

$$C_N = \text{Kronecker product of } \tilde{W}_{N_0} \text{ and } E_{N_1}$$

$$= \tilde{W}_{N_0} \otimes E_{N_1} \otimes \tilde{W}_{N_0}$$

where $N = N_0 N_1$
 $= 2^M$
 $M = M_0 + M_1$
 $N_0 = 2^{M_0}$
 $N_1 = 2^{M_1}$

49 N chip hybrid-generalized complex Walsh code block C_N
 C_N = hybrid complex Walsh $N \times N$ orthogonal code matrix consisting of N rows of N chip code vectors
 $= [C_N(c)]$ matrix of row vectors $C_N(c)$
 $= [C_N(c,n)]$ matrix of elements $C_N(c,n)$
 $C_N(c,n)$ = hybrid complex Walsh code c chip n
 $= \tilde{W}_{N_0}(c\tilde{w}, n\tilde{w}) E_{N_1}(ce, ne)$

$$= [+/-1 \ +/-j] E_{N_1}(ce, ne) \quad \text{values}$$

$$\text{where } c = ce + c\tilde{w} N_1$$

$$n = ne + n\tilde{w} N_1$$

5 **50** Binary indexing of codes in the matrix C_N

$$\begin{aligned} c &= ce_0 + ce_1 2 + \dots + ce_{M_1-1} 2^{M_1-1} \\ &\quad + c\tilde{w}_{M_1} 2^{M_1} + c\tilde{w}_{M_1+1} 2^{M_1+1} + \dots + c\tilde{w}_{M-1} 2^{M-1} \\ &= ce_0 ce_1 \dots ce_{M_1-1} c\tilde{w}_{M_1} c\tilde{w}_{M_1+1} \dots c\tilde{w}_{M-1} \quad \text{Binary word} \\ n &= ne_0 + ne_1 2 + \dots + ne_{M_1-1} 2^{M_1-1} \\ &\quad + n\tilde{w}_{M_1} 2^{M_1} + n\tilde{w}_{M_1+1} 2^{M_1+1} + \dots + n\tilde{w}_{M-1} 2^{M-1} \\ &= ne_0 ne_1 \dots ne_{M_1-1} n\tilde{w}_{M_1} n\tilde{w}_{M_1+1} \dots n\tilde{w}_{M-1} \quad \text{Binary word} \end{aligned}$$

51 The fast encoding algorithm starts with the data symbol vector d and mapping of the user groups u_0, u_1, \dots, u_{M-1} into the data fields of d . This mapping is identical to the mapping defined in equations (3) for the multiple data rate complex Walsh orthogonal encoding of the CDMA over an N chip block. However, the fast algorithm for the hybrid complex Walsh encoding is modified to accommodate the Kronecker construction as illustrated by the following fast algorithm for the hybrid complex Walsh example in **48**. Using the binary representations of d, n

$$\begin{aligned} d &= d_0 d_1 \dots d_{M_1-1} d_{M_1} \dots d_{M-1} \\ &= de_0 de_1 \dots de_{M_1-1} d\tilde{w}_{M_1} \dots d\tilde{w}_{M-1} \\ n &= n_0 n_1 \dots n_{M_1-1} n_{M_1} \dots n_{M-1} \\ &= ne_0 ne_1 \dots ne_{M_1-1} n\tilde{w}_{M_1} \dots n\tilde{w}_{M-1} \end{aligned}$$

25 and the same approach used to derive the fast algorithms **41** in equations (3) and **44** in equations (4), enables the M pass fast algorithm to be defined

Pass 1 for complex Walsh codes

$$\begin{aligned}
 & Z^{(1)} (d_0 \cdots d_{M_1-1} n_{M_1} d_{M_1+1} \cdots d_{M-1}) \\
 & = \sum Z (d_0 \cdots d_{M-1}) \cdot \\
 & \quad [(-1)^{dr_{M_1} n_{M_1} + j} (-1)^{di_{M_1} n_{M_1} + j}] \\
 & \quad d_{M_1} = dr_{M_1} = di_{M_1} = 0,1
 \end{aligned}$$

Pass m for m=2,...,M₀ for complex Walsh codes

$$\begin{aligned}
 & Z^{(m)} (d_0 \cdots d_{M_1-1} n_{M_0-1} \cdots n_{M_0-m} d_{M_1+m} \cdots d_{M-1}) \\
 & = \sum Z^{(m-1)} (d_0 \cdots d_{M_1-1} n_{M_0-1} \cdots n_{M_0-m+1} d_{M_1+m-1} \cdots d_{M-1}) \cdot \\
 & \quad [(-1)^{dr_{m-1} (n_{M_0-m} + n_{M_0-m+1}) +} \\
 & \quad \quad + j (-1)^{di_{m-1} (n_{M_0-m} + n_{M_0-m+1})}] \\
 & \quad d_{M_1+m-1} = dr_{m-1} = di_{m-1} = 0,1
 \end{aligned}$$

⋮

Pass M₀+m=M₀+1,...,M₀+M₁-1=M-1 for complex DFT codes

$$\begin{aligned}
 & Z^{(M_0+m)} (d_0 \cdots d_{M_1-m-1} n_{M_0+m-1} \cdots n_0) \\
 & = \sum Z^{(M_0+m-1)} (d_0 \cdots d_{M_1-m} n_{M_0+m-2} \cdots n_0) \cdot \\
 & \quad [e^{j2\pi} d_{M_1-m} (n_{M_0} + n_{M_0+1}^2 + \cdots + n_{M_0+m-1}^{2^{m-1}}) / 2^m] \\
 & \quad d_{M_1-m} = 0,1
 \end{aligned}$$

⋮

Page 39 Specification amendments to 09/846,410

In line 16 please delete the strikethrough word and add the underlined word.

Pass M for complex DFT codes

$$\begin{aligned}
 & Z^{(M)}(n_{M-1} \cdots n_1 n_0) \\
 &= \sum_{d_0=0,1} Z^{(M-1)}(d_0 n_{M-2} \cdots n_1 n_0) \circ \\
 & \quad \left[e^{j2\pi} d_0 (n_{M-2} + n_{M-2} + 1^2 + \cdots + n_{M-1} 2^{M-1} - 1) / 2^M \right] \\
 &= \tilde{Z}(n_{M-1} n_{M-2} \cdots n_1 n_0)
 \end{aligned}$$

10 An additional re-ordering pass is added to change the encoded N chip block $\tilde{Z}(n_{M-1} n_{M-2} \cdots n_1 n_0)$ in bit reversed ordering to the normal readout ordering

$$\hat{Z}(n_0 n_1 \cdots n_{M-2} n_{M-1}) = \tilde{Z}(n)$$

15 The fast algorithm in 51 is a computationally efficient means to implement the hybrid-generalized complex Walsh encoding of each N chip code block for multiple data rate users whose lowest data rate corresponds to the data symbol rate of an N chip encoded user. The computational complexity of this fast encoding
20 algorithm can be estimated using the computational complexities of the complex Walsh and the DFT fast encoding algorithms, which gives the estimate: $R_A \approx 2M + M_1 + 2$ real additions per data symbol, and $R_M \approx 2M_1$ real multiplies per data symbol.

25 The fast algorithm in 51 consists of M signal processing passes on the stored data symbols, followed by a re-ordering pass for readout of the N chip block of encoded data symbols. Advantage is taken of the equality $c=d$ which allows the d to be used in the code indices for the complex Walsh: $d_m = c_m$, $d_r = c_r$,
30 $d_i = c_i$. Pass 1 implements 2 chip encoding, passes $m=2, \dots, M_0$ implement 2^m chip encoding with the complex Walsh codes, passes

Page 40 Specification amendments to 09/846,410

In line 4 please delete the strikethrough numbers and add the underlined numbers.

In lines 14-15 please delete the strikethrough text.

In lines 20-22 please delete the strikethrough text and add the underlined text.

In lines 28-29 please delete the strikethrough text.

$M_0+1, M_0+2, \dots, M_0+M_1-1=M-1$ implement 2^{M_0+m} chip encoding with the complex DFT codes, and the last pass M encodes the $N=2^M$ chip data symbols with the DFT codes. This fast algorithm only differs from the fast algorithms in ~~46-41,44~~ in equations (3), (4) in the use of both the complex Walsh codes and the complex DFT codes with their Kronecker indexing. Unlike the fast algorithm for the real Walsh encoding as well as the algorithm for the complex DFT encoding, the complex Walsh portion of the fast algorithm **51** uses both the sign of the complex Walsh code from the current pass and from the previous pass starting with pass 2.

The generalization of the fast algorithm in **51** in equations **(6)** to other Kronecker product constructions for C_N and to the more general constructions for C_N ~~discussed in reference {6}~~—should be apparent to anyone skilled in the CDMA communications art.

Receiver equations **(7)** describe a representative multiple data rate complex Walsh CDMA decoding for multiple data users for the receiver in FIG. 3 using the definition of the hybrid complex Walsh CDMA codes in 36 in equations (3) ~~the invention application {6}~~. The receiver front end **52** provides estimates $\{\hat{Z}(n)\}$ of the transmitted multiple data rate complex Walsh CDMA encoded chips $\{Z(n)\}$. Orthogonality property **53** is expressed as a matrix product of the complex Walsh code chips or equivalently as a matrix product of the complex Walsh code chip numerical signs of the real and imaginary components, for any of the $2, 4, 8, \dots, N/2, N$ chip complex Walsh channelization codes ~~and their repetitions over the N chip code block~~. The 2-phase PN codes **54** have the useful decoding property that the square of each code chip is unity which is equivalent to observing that the square of each code chip numerical sign is unity.

Page 41 Specification amendments to 09/846,410

In lines 2-3 please delete the strikethrough words and add the underlined words.

In line 23 please delete the strikethrough words and add the underlined words.

Receiver multiple data rate decoding of hybrid ~~complex~~
~~Walsh~~ and generalized hybrid ~~complex~~ Walsh CDMA (7)

5

52 Receiver front end in FIG. 3 provides estimates
 $\{\hat{Z}(n)\}$ 28 of the encoded transmitter chip symbols
 $\{Z(n)\}$ 41 in equations (3)

10

53 Orthogonality properties of the complex Walsh NxN
matrix

$$\sum_n \tilde{W}_N(\hat{c}, n) \tilde{W}_N^*(n, c) =$$

$$\sum_n [\text{sgn}\{W_N(\hat{c}r, n) + j \text{sgn}\{W_N(\hat{c}i, n)\}][\text{sgn}\{W_N(n, cr)\} - j \text{sgn}\{W_N(n, ci)\}]$$

$$= 2N \delta(\hat{c}, c)$$

15

where $\hat{c}, c, n = 0, 1, \dots, N$

$$\delta(\hat{c}, c) = \text{Delta function of } \hat{c} \text{ and } c$$

$$= 1 \quad \text{for } \hat{c} = c$$

$$= 0 \quad \text{otherwise}$$

$cr = cr(c)$, $ci = ci(c)$ are defined

20

in equations (3)

54 PN de-scrambling of the receiver estimates of the
~~complex-hybrid~~ and generalized hybrid ~~complex~~ Walsh
encoded data chips

25

$P_R(n), P_I(n)$ = PN code chip n for real and imaginary axes

$$\tilde{\hat{Z}}(n) = \text{PN de-scrambled receiver estimates of the}$$

$$\text{transmitted CDMA encoded chips } \hat{Z}(n)$$

$$= \hat{Z}(n) [P_R(n) - j P_I(n)]$$

30

55a Complex Walsh decoding and uses a computationally efficient fast encoding algorithm. This algorithm implements the decoding with an M pass computation. Passes 1,2,3,...,M respectively perform the 2,4,8,...,N chip complex Walsh decoding of the data symbol vector successively starting with the 2 chip decoding in pass 1, the 4 chip decoding in passes 1,2, and the N chip decoding in passes 1,2,3,...,M where $N=2^M$. Using the binary word representations for both d and n, this M pass algorithm is:

Pass 1:

$$\begin{aligned} \hat{Z}^{(1)}(d_{M-1}n_1n_2\cdots n_{M-2}n_{M-1}) \\ = \sum_{n_0=0,1} \hat{Z}(n_0n_1n_2\cdots n_{M-2}n_{M-1}) \bullet \\ \quad \uparrow \quad \quad \quad [(-1)^{n_0dr_{M-1}} - j(-1)^{n_0di_{M-1}}] \end{aligned}$$

⋮

Pass m for $m=2, \dots, M-1$

$$\begin{aligned} \hat{Z}^{(m)}(d_{M-1}d_{M-2}\cdots d_{M-m}n_m\cdots n_{M-2}n_{M-1}) \\ = \sum \hat{Z}^{(m-1)}(d_{M-1}d_{M-2}\cdots d_{M-m+1}n_{m-1}\cdots n_{M-2}n_{M-1}) \bullet \\ \quad \uparrow \quad \quad \quad [(-1)^{n_{m-1}}(dr_{M-m}+dr_{M-m+1}) - j(-1)^{n_{m-1}}(di_{M-m}+di_{M-m+1})] \\ n_{m-1}=0,1 \end{aligned}$$

⋮

Pass M

$$\begin{aligned} \hat{Z}^{(M)}(d_{M-1}d_{M-2}\cdots d_0) \\ = \sum \hat{Z}^{(M-1)}(d_{M-1}d_{M-2}\cdots d_1n_0) \bullet \\ \quad \uparrow \quad \quad \quad [(-1)^{n_{M-1}}(dr_0+dr_1) - j(-1)^{n_{M-1}}(di_0+di_1)] \\ n_{M-1}=0,1 \\ = N \hat{Z}(d_{M-1}d_{M-2}\cdots d_0) \end{aligned}$$

Page 43 Specification amendments to 09/846,410

In line 11 please delete the strikethrough word and add the underlined word.

An additional re-ordering pass is added to change the decoded N chip block $\hat{Z}(d_{m-1}d_{m-2}\cdots d_0)$ in bit reversed ordering to the normal readout ordering. In this representative fast implementation the scaling factor N has been removed in the re-ordering pass whereas a typical implementation will re-scale each pass. The output of this final pass is the receiver estimate of the transmitted data symbol vector

$$\hat{Z}(d_0d_2\cdots d_{M-1}) = \hat{Z}(d)$$

55b ~~Hybrid~~ Generalized complex Walsh decoding uses a computationally efficient fast encoding algorithm. Similar to the complex Walsh this algorithm implements the decoding with an M pass computation 1,2,3,...,M:

Pass $m=1,\dots,M_1$ for complex DFT codes

$$\begin{aligned} & \hat{Z}^{(m)}(n_0 \cdots n_{M-m-1} d_{m-1} \cdots d_0) \\ &= \sum \hat{Z}^{(m-1)}(n_0 \cdots n_{M-m} d_{m-2} \cdots d_0) \cdot \\ & \quad \uparrow [e^{j2\pi} n_{M-m} (d_0 + d_1 2 + \cdots + d_{m-1} 2^{m-1}) / 2^m] \end{aligned}$$

$$n_{M-m} = 0, 1$$

⋮

Pass $M_1+m=M_1+1, M_1+2, \dots, M-1$ for complex Walsh codes

$$\hat{Z}^{(M_1+m)}(d_{M-1} \cdots d_{M-m} n_m \cdots n_{M_0-1} d_{M_1-1} \cdots d_0)$$

$$= \sum \hat{Z}^{(M_1+m-1)} (d_{M-1} \cdots d_{M-m-1} n_{m-1} \cdots n_{M_0-1} d_{M_1-1} \cdots d_0) \bullet$$

$$[(-1)^{n_{m-1}} (dr_{M_0-m} + dr_{M_0-m+1})$$

$$-j (-1)^{n_{m-1}} (di_{M_0-m} + di_{M_0-m+1})$$

$$5 \quad n_{m-1} = 0, 1$$

Pass M for complex Walsh codes

$$\hat{Z}^{(M)} (d_{M-1} \cdots d_1 d_0)$$

$$10 \quad = \sum \hat{Z}^{(M-1)} (d_{M-1} \cdots d_{M-m-1} n_{M_0-1} d_{M_1-1} \cdots d_0) \bullet$$

$$[(-1)^{n_{M_0-1}} (dr_0 + dr_1)$$

$$-j (-1)^{n_{M_0-1}} (di_0 + di_1)$$

$$n_{M_0-1} = 0, 1$$

$$= \hat{Z} (d_{M-1} d_{M-2} \cdots d_1 d_0)$$

15

An additional re-ordering pass is added to change the decoded N chip block $\hat{Z} (d_{m-1} d_{m-2} \cdots d_0)$ in bit reversed ordering to the normal readout ordering. In this representative fast implementation the scaling factor N has been removed in the re-ordering pass whereas a typical implementation will re-scale each pass. The output of this final pass is the receiver estimate of the transmitted data symbol vector

20

$$\hat{Z} (d_0 d_2 \cdots d_{M-1}) = \hat{Z} (d)$$

25

Page 45 Specification amendments to 09/846,410

In line 3 please delete the ~~strikethrough~~ word and add the underlined word.

In line 6 please delete the ~~strikethrough~~ text.

In line 13 please ~~delete~~ the ~~strikethrough~~ word and add the underlined word.

In line 24 please delete the ~~strikethrough~~ word and add the underlined word.

In lines 32-34 please delete the ~~strikethrough~~ text and add the underlined text.

The fast decoding algorithms **55a**, **55b** perform the inverse of the signal processing for the encoding **41**, **51** in equations (3), (6) of the complex, generalized hybrid-complex Walsh respectively, to recover estimates $\{\hat{Z}(d)\}$ of the transmitter user data symbols $\{Z(d)\}$. These algorithms are computationally efficient means to implement the ~~complex and hybrid complex~~ Walsh decoding of each N chip code block for multiple data rate users whose lowest data rate corresponds to the data symbol rate of an N chip encoded user. For the fast Walsh decoding algorithm in **55a** the number of required real additions R_A per data symbol is approximately equal to $R_A \approx 2M+2$ which is identical to the complexity metric for the fast encoding algorithm. For the fast generalized hybrid-complex Walsh decoding algorithm in **55b** the computational complexity is $R_A \approx 2M+M_1+2$ real additions per data symbol and $R_M \approx 2M_1$ real multiplies per data symbol which is identical to the complexity metric for the fast encoding algorithm.

For the complex Walsh decoding the fast algorithm **55a** implements M signal processing passes on the N chip block of received data chips after de-scrambling, followed by a re-ordering pass of the receiver recovered estimates of the data symbols. Passes $m=1,2,\dots,M$ implement 2^m chip decoding. For the generalized hybrid-complex Walsh the fast algorithm **55b** combines the complex Walsh algorithm with a DFT algorithm in M signal processing passes where $M=M_0+M_1$ with M_0 , M_1 respectively designating the complex Walsh, DFT decoding passes. Passes $m=1,\dots,M_1$ implement the complex DFT decoding and the remaining passes $M_1+1,\dots,M-1$ implement decoding with the complex Walsh codes, and the last pass M completes the complex decoding.

FIG. 5 ~~complex/hybrid and generalized hybrid complex~~ Walsh CDMA encoding is a representative implementation of the ~~complex and hybrid complex (complex/hybrid complex)~~ Walsh CDMA encoding

Page 46 Specification amendments to 09/846,410

In lines 7-9 please delete the strikethrough words and add the underlined words.

In lines 22,24 please delete the strikethrough text and add the underlined text.

In lines 31-34 please delete the strikethrough text and add the underlined text.

which replaces the current real Walsh encoding 13 in FIG. 1, and is defined in equations (3) and (6). The input user data symbols $\{Z(u_{m,k_n})\}$ 56 are mapped into the data symbol vector 57 $Z(d)$ as described in equations (3). Data symbols $\{Z(d)\}$ are
 5 encoded and summed over the user data symbols in 58 and 59 by the fast encoding algorithm in equations 41 in (3) for the hybrid ~~complex~~ Walsh and in equations 51 in (6) for the generalized hybrid ~~complex~~ Walsh. For the generalized hybrid ~~complex~~ Walsh, the fast DFT encoding 59 follows the fast
 10 complex Walsh encoding 58. This encoding and summing over the user data symbols is followed by PN encoding with the scrambling sequence $[P_R(n)+jP_I(n)]$ 60. Output is the stream of complex CDMA encoded chips $\{Z(n)\}$ 61.

15 It should be obvious to anyone skilled in the communications art that this example implementation in FIG. 5 clearly defines the fundamental CDMA signal processing relevant to this invention disclosure and it is obvious that this example is representative of the other possible signal processing
 20 approaches.

FIG. 6 ~~complex~~ hybrid and generalized /hybrid ~~complex~~ Walsh CDMA decoding is a representative implementation of ~~complex/hybrid Walsh~~ CDMA decoding which replaces the current
 25 real Walsh decoding 27 in FIG. 3 and is defined in equations (7). Inputs are the received estimates of the complex CDMA encoded chips $\{\hat{Z}(n)\}$ 62. The PN scrambling code is stripped off from these chips 63 by changing the sign of each chip according to the numerical sign of the real and imaginary components of the
 30 complex conjugate of the PN code as per the decoding algorithms 54 in equations (7). The ~~complex/hybrid and generalized hybrid ~~complex~~ Walsh~~ channelization coding is removed by the fast decoding algorithms in equations 55 in (7) ~~for the complex/hybrid ~~complex~~ Walsh~~, to recover the receiver estimates

Page 47 Specification amendments to 09/846,410

In lines 1-3 please delete the strikethrough words and add the underlined words.

In line 23 please delete the strikethrough word.

In line 29 please delete the strikethrough words and add the underlined words.

$\{\hat{Z}(d)\}$ of the transmitted data symbols $\{Z(d)\}$. The complex ~~Walsh~~
DFT fast decoding **64** is followed by the ~~complex-DFT-Walsh~~ fast
decoding **65** for the generalized hybrid ~~complex-Walsh~~. Decoded
outputs are the estimated data vector $\hat{Z}(d)$ **66** whose entries
5 are read out as the set of receiver estimates $\{\hat{Z}(u_{m,k_m})\}$ **67** of
the transmitted data symbols.

It should be obvious to anyone skilled in the
communications art that this example implementation in FIG. 6
10 clearly defines the fundamental CDMA signal processing relevant
to this invention disclosure and it is obvious that this example
is representative of the other possible signal processing
approaches.

15 Preferred embodiments in the previous description is
provided to enable any person skilled in the art to make or use
the present invention. The various modifications to these
embodiments will be readily apparent to those skilled in the art,
20 and the generic principles defined herein may be applied to other
embodiments without the use of the inventive faculty. Thus, the
present invention is not intended to be limited to the
embodiments shown herein but is ~~not~~ to be accorded the wider
scope consistent with the principles and novel features disclosed
25 herein.

It should be obvious to anyone skilled in the
communications art that this example implementation of the
~~complex-hybrid~~ Walsh and generalized hybrid ~~complex-Walsh~~ for
30 multiple data rate users in equations (3), ..., (7) clearly defines
the fundamental CDMA signal processing relevant to this invention
disclosure and it is obvious that this example is representative
of the other possible signal processing approaches. For example,

Page 48 Specification amendments to 09/846,410

In lines 1-4 please delete the strikethrough comma and add the underlined text.

In lines 7,9-11 please delete the strikethrough text and add the underlined text.

In lines 27-35 please delete the strikethrough text.

the Kronecker matrices E_N and H_N can be replaced by a plurality of codes and the Kronecker construction can be replaced by direct sum construction and by functionals.— and the resultant codes can be quasi-orthogonal.

5

For cellular applications the transmitter description ~~which includes equations (18) describes~~ is representative of the transmission signal processing applicable to this invention for both the hub and user terminals, and the receiver description is
10 ~~corresponding to the decoding of equations (18) describes~~ is representative of the corresponding receiving signal processing for the hub and user terminals for applicability to this invention.

15 For optical communications applications the the microwave processing at the front end of both the transmitter and the receiver is replaced by the optical processing which performs the complex modulation for the optical laser transmission in the transmitter and which performs the optical laser receiving
20 function of the microwave processing to recover the complex baseband received signal.

25

REFERENCES:

- ~~{1} IEEE Journal on selected areas in communications August 2000 Vol. 18 No. 8, "Wideband CDMA"~~
30 ~~{2} IEEE Communications magazine July 2000 Vol. 38 No. 7, "Multiple Access for Broadband Networks"~~
~~{3} IEEE Communications magazine September 1998 Vol. 36 No. 9, "Wideband CDMA"~~
~~{4} IEEE Personal Communications April 1998 Vol. 5 No. 2, "Third~~
35 ~~Generation Mobile Systems in Europe"~~

Page 49 Specification amendments to 09/846,410

In lines 1-4 please delete the strikethrough text

~~{5} K.G. Beauchamp's book "Walsh functions and their Applications", Academic Press 1975~~

~~{6} Patent application, filed Jan. 9, 2001, by U.A. von der Embse~~



APPLICATION NO. 09/846,410

TITLE OF INVENTION: Multiple Data Rate Hybrid Walsh Codes for
CDMA

INVENTOR: Urbain A. von der Embse

Currently amended ABSTRACT OF THE DISCLOSURE

APPLICATION NO. 09/846,410

TITLE OF INVENTION: Multiple Data Rate ~~Complex~~ Hybrid Walsh Codes
for CDMA

INVENTOR: Urbain A. von der Embse

ABSTRACT OF THE DISCLOSURE

ABSTRACT

~~The present invention describes new~~A method and system using the fast encoding and decoding of hybrid Walsh CDMA and generalized hybrid Walsh CDMA codes for simultaneous transmission of multiple data rate users with the different data rate groups of users separated in the sequency domain of these complex CDMA channelization codes. ~~multiple data rate algorithms for complex Walsh and hybrid complex Walsh orthogonal CDMA channelization encoding and decoding of multiple data rate users, which generate a means to accomodate multiple data rate users over the same CDMA frequency band using complex Walsh and hybrid complex Walsh orthogonal codes. Complex Walsh and hybrid complex Walsh orthogonal CDMA codes have been disclosed in a previous patent application for constant data rate communications. The means of this invention is to provide complex Walsh and hybrid complex Walsh with the means to separate the different data rate users in the sequency domain of the complex Walsh analogous to the current use of different frequency bands for the different data rate users. Sequency for complex Walsh and hybrid complex Walsh codes is the average rate of phase angle rotations of the code vectors, and is for hybrid Walsh codes analogous sequency is in a 1-to-1 correspondence with to frequency for the discrete Fourier transform codes. in the Fourier domain. Hybrid Walsh codes are derived from lexicographic permutations of the real Walsh and can take values {1,j,-1,-j}. Generalized hybrid Walsh codes are orthogonal and quasi-orthogonal complex codes derived from tensor (Kronecker) product construction, direct product construction, and functional~~

combining of the plurality of codes including the hybrid Walsh and discrete Fourier transform codes.

~~Current art uses algorithms to generate multiple code length real Walsh CDMA orthogonal codes for the next generation wideband CDMA (W-CDMA), which are orthogonal variable spreading factor (OVSF) CDMA codes. Variable spreading factor refers to a variable code length. The present invention provides a means to significantly improve CDMA performance for multiple data rate users by allowing the use of the new complex Walsh and hybrid complex Walsh CDMA orthogonal codes in place of the real Walsh OVSF CDMA orthogonal codes and with implementation means for fast and computationally efficient encoding and decoding.~~

APPLICATION NO. 09/846,410

TITLE OF INVENTION: Multiple Data Rate Hybrid Walsh Codes for
CDMA

INVENTOR: Urbain A. von der Embse

Currently amended CLAIMS

APPLICATION NO. 09/846,410

TITLE OF INVENTION: Multiple Data Rate Hybrid Walsh Codes for
CDMA

INVENTOR: Urbain A. von der Embse

List of claims and status

Claim 1 (cancelled)
Claim 2 (cancelled)
Claim 3 (cancelled)
Claim 4 (cancelled)
Claim 5 (currently amended)
Claim 6 (currently amended)



APPLICATION NO. 09/846.410

TITLE OF INVENTION: Multiple Data Rate ~~Complex~~-Hybrid Walsh Codes
for CDMA

INVENTORS: Urbain A. von der Embse

CLAIMS

WHAT IS CLAIMED IS:

Claim 1. (cancelled) ~~A means for the implementation of new fast algorithms for complex Walsh orthogonal CDMA encoding and decoding of multiple data rate users over a CDMA frequency band with properties which~~

~~— provide a complex Walsh orthogonal code with the real component equal to the real Walsh orthogonal code, and with the imaginary component equal to a reordering of the real Walsh orthogonal code which makes the complex Walsh orthogonal code the correct complex version of the real Walsh orthogonal code to within arbitrary angle rotations and scale factors~~

~~— provide complex Walsh orthogonal CDMA codes which reduce to the real Walsh orthogonal CDMA codes upon removal of the imaginary code components~~

~~provide a means to encode and decode multiple data rate users with complex Walsh orthogonal codes for simultaneous transmission over the same CDMA frequency band with computationally efficient algorithm means to implement the encoding and decoding~~

~~— provide a computationally efficient algorithm means to encode and decode multiple data rate users with complex Walsh orthogonal codes with values ± 1 $\pm j$, for simultaneous transmission over the same CDMA frequency band~~

Claim 2. (cancelled) ~~A means for the implementation of new hybrid complex Walsh orthogonal CDMA encoding and decoding of multiple data rate users over a CDMA frequency band with properties~~

~~provide a means for the construction of hybrid complex Walsh orthogonal CDMA codes which are functional combinations of the complex Walsh, discrete Fourier transform (DFT), Hadamard (real Walsh), and other orthogonal codes and which offer wider choices of code lengths~~

~~provide a means to extend the complex Walsh orthogonal CDMA codes to include the complex discrete Fourier transform (DFT) codes and other orthogonal codes to allow greater flexibility in the choices for the code lengths~~

~~provide new fast algorithm means for the encoding and decoding of hybrid complex Walsh codes for multiple data rate users~~

Claim 3. (cancelled) ~~A means for the design of hybrid complex Walsh orthogonal CDMA encoding and decoding of multiple data rate users over a CDMA frequency band with properties~~

~~provide a means to provide greater flexibility in the selection of the code length by combining the complex Walsh orthogonal CDMA codes with the complex DFT orthogonal CDMA codes as well as with other orthogonal codes~~

~~provide a Kronecker product means to combine the complex Walsh orthogonal CDMA codes with complex DFT orthogonal CDMA codes as well as with other orthogonal CDMA codes~~

~~provide a direct sum means to combine the complex Walsh orthogonal CDMA codes with complex DFT orthogonal CDMA codes as well as with other orthogonal CDMA codes~~

~~provide a functionality means to combine the complex Walsh orthogonal CDMA codes with complex DFT orthogonal CDMA codes as well as with other orthogonal CDMA codes~~

~~provide new fast algorithm means for the encoding and decoding of hybrid complex Walsh codes for multiple data rate users~~

Claim 4. (cancelled) ~~A means to provide unconstrained flexibility in the selection of the code length by functional combining of appropriate orthogonal CDMA codes drawn from a set of code candidates that include the complex Walsh and the complex DFT~~

~~provide a functional means for the generation of orthogonal CDMA codes with unconstrained flexibility in the selection of the code length~~

~~provide a fast algorithm means for the encoding and decoding of CDMA codes designed with a functional means for the generation of orthogonal CDMA codes with unconstrained flexibility in the selection of the code length~~

~~provide a functional means for the generation of orthogonal CDMA codes for multiple data rate users with unconstrained flexibility in the selection of the code length~~

~~provide a fast algorithm means for multiple data rate encoding and decoding of orthogonal CDMA codes which are generated by a functional means for multiple data rate users to provide unconstrained flexibility in the selection of the code length~~

Claim 5. (currently amended) ~~A method for the design and implementation of fast encoders and fast decoders for Hybrid Walsh complex orthogonal and generalized Hybrid-hybrid Walsh complex orthogonal and quasi-orthogonal CDMA channelization codes for multiple data rate users comprising over a frequency band with properties~~

means to generate inphase and quadrature code components
~~Hybrid Walsh inphase (real axis) codes and quadrature (imaginary~~

~~axis) codes are defined of the hybrid Walsh by lexicographic reordering permutations of the Walsh code,~~

~~Hybrid Walsh codes have a 1-to-1 sequency~frequency, correspondence with the DFT codes and have a 1-to-1 even~cosine, and odd~sine correspondences of the hybrid Walsh with the DFT codes,~~

~~Hybrid Walsh codes take values $\{1+j, -1+j, -1-j, 1-j\}$ or equivalently take values $\{1, j, -1, -j\}$ with a (-45) rotation of axes and a renormalization~~

~~means to construct generalized Hybrid Walsh orthogonal and quasi-orthogonal codes generalized Hybrid Walsh codes can be constructed for a wide range of code lengths by combining Hybrid from hybrid Walsh, Walsh, with DFT (discrete Fourier transform), Hadamard quasi-orthogonal PN (pseudo-noise) codes, and the plurality of other orthogonal codes, and quasi-orthogonal PN codes using tensor product, direct product, and functional combining,~~

~~fast encoding and fast decoding implementation algorithms are defined~~

~~means algorithms are defined to map multiple data rate user data symbols onto the code input data symbol vector for fast encoding and the inverse mapping for inverses of these algorithms are defined for recovery of the data symbols with fast decoding, and~~

~~representative algorithms to implement fast encoding and decoding.~~

~~encoders perform complex multiply encoding of complex data to replace the current Walsh real multiply encoding of inphase and quadrature data~~

~~decoders perform complex conjugate transpose multiply decoding of complex data to replace the current Walsh real multiply decoding of inphase and quadrature data~~

Claim 6. (currently amended) Complex A method for the design and implementation of encoders and decoders for complex orthogonal CDMA and generalized complex orthogonal and quasi-orthogonal complex orthogonal CDMA channelization codes for multiple data rate users comprising over a frequency band with properties

means to generate complex codes inphase (real axis) codes and quadrature code components (imaginary axis) codes are defined of the complex code by reordering permutations of the real Walsh codes,

means to construct generalized orthogonal and quasi-orthogonal codes from the codes in Claim 5, Walsh, complex codes can be constructed for a wide range of code lengths by combining the complex codes with DFT, (discrete Fourier transform), Hybrid Walsh, Hadamard and other orthogonal codes, and quasi-orthogonal PN codes, and the plurality of other codes using tensor product, direct product, and functional combining,

means to map multiple data rate user data symbols onto the code input data symbol vector for fast encoding and the inverse mapping for fast decoding, and

representative algorithms to implement fast encoding and fast decoding. implementation algorithms are defined

~~algorithms are defined to map multiple data rate user data symbols onto the code input data symbol vector for fast encoding and the inverses of these algorithms are defined for recovery of the data symbols with fast decoding~~

~~encoders perform complex multiply encoding of complex data to replace the current Walsh real multiply encoding of inphase and quadrature data~~

~~decoders perform complex conjugate transpose multiply decoding of complex data to replace the current Walsh real multiply decoding of inphase and quadrature data~~